

# 825917

Product Sheet

**ares®**


ARES Srl  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - web@aresill.net

## Alice


- Compact recessed luminaire for outdoor installation in the wall.
- Configuration: die-cast aluminium structure. EN AB-47100 alloy (low copper content).
- Double layer coating for high resistance to corrosion: The low copper Aluminium alloy is painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Tempered sandblasted glass, moulded silicone gaskets.
- Protection Rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: I, LED module: I, III.
- Installation: wiring through two M16 plastic cable glands (4,5

IP65   

### Available Colors for this Version

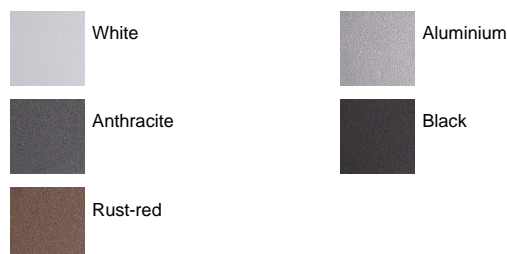


### Alice / Horizontal Frame

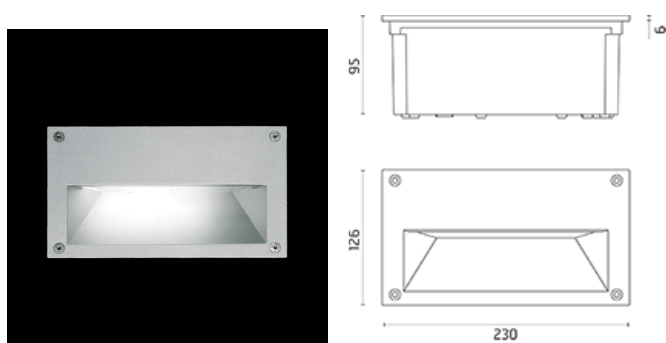

### Warnings

#### Wall Recessed

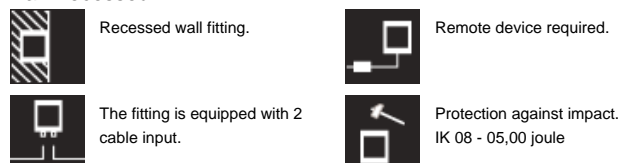

### Light Flux, Placement



### Product Code Details

# 825917

Light Source



TC-DEL 18W G24q-2  
Electronic ballast



## Accessories

---



Box for installation  
236 x 136 H 103 mm  
Code: 77