

# 542003

Product Sheet

**ares®**


ARES Srl  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - web@aresill.net

## Eclipse


- Slim round LED luminaire for outdoor installation on wall.
- Configuration: die-cast aluminium structure. EN AB 47100 alloy (low copper content).
- Double layer coating for high resistance to corrosion: The low copper Aluminium alloy is painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Transparent polycarbonate emitting unit and neoprene gasket.
- Protection Rating: IP65.
- In compliance with EN60598-1 standards.
- Class of insulation: II; 24V version: III.
- Installation: the luminaire is equipped with a piece of neoprene bipolar cable (approx.200mm) for an easy-to-make connection. Direct screwing on surface through stainless steel fixing bracket.
- We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP65   

### Available Colors for this Version

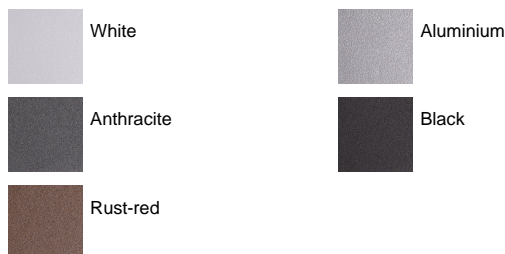


## Eclipse Mid-Power LED

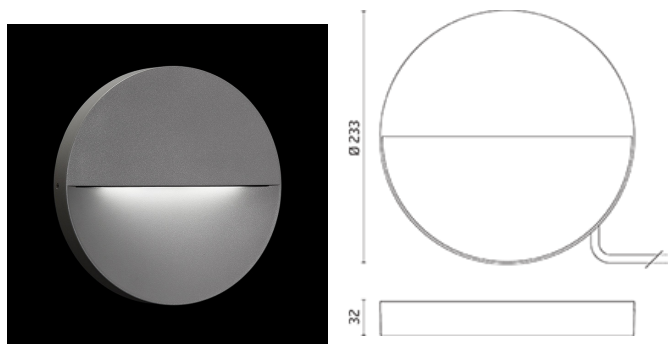

## Warnings

### Wall

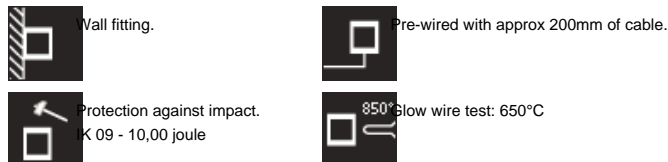

## Light Flux, Placement



## Product Code Details

# 542003

Light Source




WARM WHITE 3000K MID-POWER LEDs 7,5W/220÷240V  
Total power 10W  
LED lm 523 FIXT lm 409  
CRI >80  
Electronic power supply included



## Accessories

---



SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20 $\mu$ s)  
Maximum operating current 10A  
Suitable for series connection - IP66  
Code: 237