

# 527003

Product Sheet

**ares®**

ARES Srl

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)


www.aresill.net - web@aresill.net

## Hyperion

- Slim rectangular luminaire for outdoor installation on wall.
- Configuration: die-cast structure. EN AB-47100 alloy (low copper content).
- Double layer coating for high resistance to corrosion: The low copper Aluminium alloy is painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Moulded polycarbonate emitting unit and polished aluminium cover fixed by double-sided technical tape (to be ordered separately).
- Protection rating: IP65.
- In compliance with EN 60598-1.
- Class of insulation: mains II; low voltage: III.
- Installation: the luminaire is equipped with 200mm of a 2-pole cable for an easy-to-make connection (please provide effective insulation on the connection) – two solutions possible: 24V feeding with remote power supply or 230V feeding with power supply hosted into the fitting.
- We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire

IP65   

### Available Colors for this Version

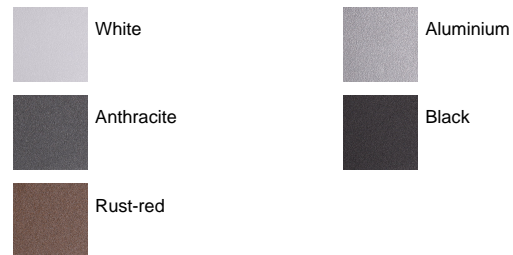

### Warnings

#### Wall



Wall fitting.



Remote device required for low voltage version.



Pre-wired with approx 200mm of cable.




Protection against impact.  
IK 09 - 10,00 joule

### Light Flux, Placement



### Hyperion Mid-Power LED

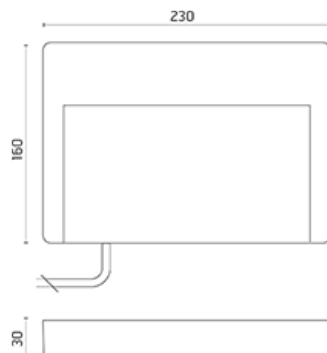

### Product Code Details

# 527003

Light Source



WARM WHITE 3000K MID-POWER LEDs 7,5W/220÷240V

Total power 10W

LED lm 726 FIXT lm 363

CRI >80

Electronic power supply included



## Accessories

---



Satin aluminium carter  
Thickness 0.5 mm  
Code: 160



SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20µs)  
Maximum operating current 10A  
Suitable for series connection - IP66  
Code: 237