

10711650

Product Sheet

ares®

ARES Srl

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)


www.aresill.net - web@aresill.net

Marco


- Square luminaire for outdoor installation on wall.
- Configuration: die-cast aluminium structure. EN AB-47100 alloy (low copper content).
- Double layer coating for high resistance to corrosion: The low copper Aluminium alloy is painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Tempered glass with silkscreen border. The diffuser is fixed to the aluminium structure through a robotic gluing system. AISI 304 stainless steel fixing plate.
- Protection Rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: II.
- Installation: wiring through two EPDM rubber cable glands (5

IP65   

Available Colors for this Version

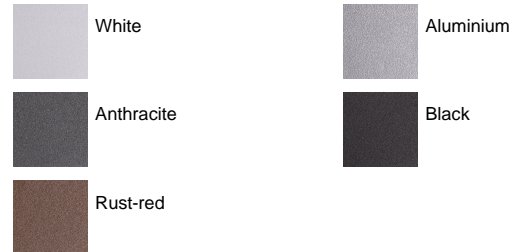

Marco Power LED / Unidirectional - Wide Beam 80°

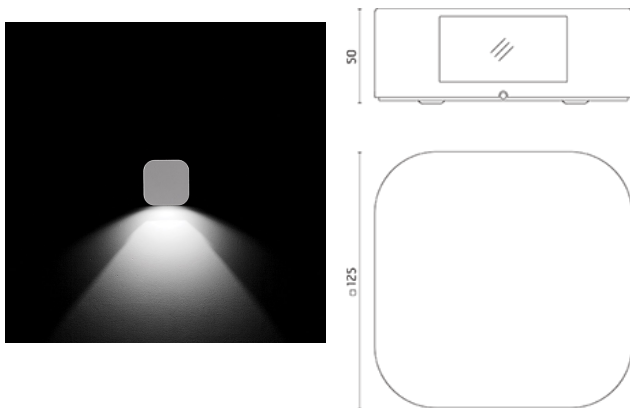

Warnings

Wall



Wall fitting.



Protection against impact.
IK 02 - 0,20 joule



The fitting is equipped with 2 cable input.

Light Flux, Placement



Product Code Details

10711650

Light Source



WARM WHITE 3000K POWER LED 1W/100÷240V

Total power 3W


LED Im 104 FIXT Im 46

CRI>80

Electronic power supply included



Accessories



SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20µs)
Maximum operating current 10A
Suitable for series connection - IP66
Code: 237