

515033

Product Sheet

ares®

ARES Srl

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)


www.aresill.net - web@aresill.net

Lambda


- Bollard for outdoor installation on floor.
- Configuration: Extruded aluminium body, aluminium base with 15 micron anodizing for high resistance to corrosion. Methacrylate diffuser. Double layer coating for high resistance to corrosion: The aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: III
- Installation: Lambda LED are equipped with a piece of neoprene cable for an easy-to-make connection. Lambda are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and allows parallel wiring. Lambda are protected against polarity reversal and sudden voltage peak.
- Installation requires a 24Vdc remote power supply.
- Parallel wiring.
- The luminaire is supplied with a 2-way terminal block for 3-conductor cables - IP68

IP65  

Available Colors for this Version

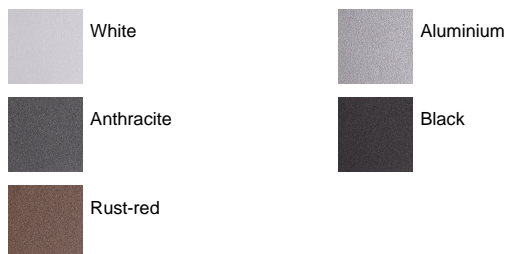

Lambda Power LED / H. 300mm - Methacrylate Diffuser

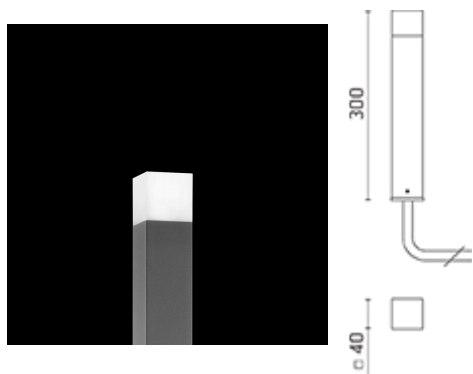

Warnings

Bollard



Light Flux, Placement



Product Code Details

515033

Light Source



WARM WHITE 3000K POWER LED 2W/12÷24Vdc

Total power 2,3W

LED Im 149 FXT Im 75

CRI >80

Remote electronic power supply to be ordered





Power supply dual function
Vout 24Vdc: 8W/100÷240V
Iout 350mA: 6X1W/100÷240V - IP65 CLASS II
SELV EQ.
Code: 106



Power supply
10W/110÷240V - 24Vdc
IP67 CLASS II SELV.
Code: 175



Power supply
20W/220÷240V - 24Vdc
IP67 CLASS II SELV.
Code: 147



Power supply
50W/120÷240V - 24Vdc
IP67 CLASS II SELV.
Code: 155



Power supply
70W/220÷240V - 24Vdc
IP67 CLASS II SELV EQ.
Code: 110



Power supply
100W /120÷240V - 24Vdc
IP67 CLASS II SELV.
Code: 156